



POSBANK®

POSMO™ III

Versatile and Space-Saving

The POSMO™ III is a compact touchscreen monitor featuring the same modern look of the APEXA® G and compact body with small footprint to save valuable counter space. Industrial-grade LED LCD panel offers bright and crisp images, extended product life and energy efficiency. Its stable base stand, adjustable viewing angle and integrated MSR/IC reader make it versatile solution for Point-of-Sale or Point-of-Information environments. It can be placed above or on a counter and on a wall.

POS Touch Monitor



POSBANK® POSMO™ III

Versatile and Space-Saving

- 15" TFT LCD with LED Backlight
- PCAP Touch or Optional Resistive Touch
- Bezel-Free True-Flat Display
- Resolution up to 1024 x 768, Brightness 300 cd/m²
- Compact Design for Limited Counter Space
- Countertop or Wall Mountable
- Interactive Digital Signage, Kiosk Solution, POS solution



Superior Touch Display

With 15" TFT LCD and up to 1024 x 768 resolution, the POSMO™ III delivers more vivid and clear image. Its PCAP touch provides fast and accurate touch response. LED backlighting of the POSMO™ III enables lower power consumption.

Versatile Solution

Removable base stand and mounting options supported by VESA standard make installation more flexible. On a wall or a counter or on a shelf or a pod, the POSMO™ III is best suited to meet a variety of POS and interactive solutions. (Point-of-Sale, Kiosk for Point-of-Information, and digital signage.)

Options & Peripherals

Touch Type

- 15" 5-Wired Resistive Touch

Wall Mount Kit

- VESA-Compatible, 75 x 75(mm), 100 x 100(mm)
With VESA mounting option, POSMO™ III can be placed on the wall or above the counter.


Card Reader

- Magnetic Stripe Reader : Comply with ISO 7811, Support 1 & 2 & 3 Track
- Smart Card Reader : EMV Level 1, 2

Dallas

- Dallas i-button Reader

Dimension

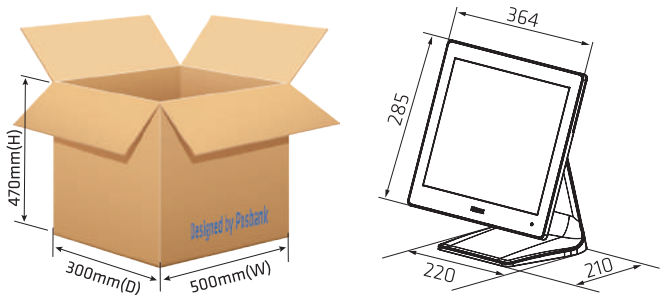

404-352-3587
800-390-6623
www.nurolpos.com


Specifications

General Specifications	
Display	
Size	15" TFT LCD, LED Backlight
Resolution	1024 x 768
Brightness	300cd/m2 (typ.)
Contrast Ratio	500 : 1
View Angle (U/D/R/L)	80°/80°/80°/80° (Typ.)
Touchscreen	
Type	Projective Capacitive Touch
Controller Interface	USB Interface
Interface	
VGA	1
HDMI	1
USB (A Type)	4
USB (B Type)	1
MSR	1 (RJ-45 for MSR, SCR, i-Button)
Audio	1 (Mic-in)
Power	
Power Supply	Adapter 12V, 3A
Physical & Environmental	
Dimensions (W x H x D)	364 x 333 x 210 (mm), 14.3 x 13.1 x 8.2(in)
Net Weight	4,800g, 10.6lbs (TBD)
Packing Dimension (W x H x D)	500 x 470 x 300 (mm), 19.6 x 18.5 x 11.8(in)
Packing Weight	7,500g, 16.5lbs (TBD)
Certification	CE, FCC, KC
Options and Peripherals	
Type	15" 5-Wired Resistive Touch
Wall Mount Kit	VESA-Compatible, 75 x 75(mm), 100 x 100(mm)
Multi-Reader	MSR : Comply with ISO 7811, Support 1& 2 & 3 Track
	SCR : EMV Level 1, 2
	Dallas : i-Button Reader


What's in the Box ?



POSMO™ III



Installation Guide



Adapter



Power Cord